PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H04N 7/087	A1	(11) International Publication Number: **WO 93/22876** (43) International Publication Date: 11 November 1993 (11.11.93)

(21) International Application Number: PCT/US93/03988

(22) International Filing Date: 28 April 1993 (28.04.93)

(30) Priority data:
9209147.9 28 April 1992 (28.04.92) GB

(71) Applicant *(for all designated States except US)*: THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 600 North Sherman Drive, Indianapolis, IN 46201 (US).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)* : LANDIS, Michael, David [US/US]; 9966 Aegean Road, Fishers, IN 46038 (US).

(74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).

(81) Designated States: BR, CA, FI, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
   With international search report.
   Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

(57) Abstract

A system for processing auxiliary video signals provides for decoding an extended data services signal in line 21 of field 2. Extended data services provide a general purpose video system information and control capability in addition to basic closed caption operation. Extended data services information is arranged in packets of data. Each packet provides information regarding current of future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING
EXTENDED DATA SERVICES

5   The present invention relates to the processing of
auxiliary video information that may be present in a video signal
during vertical blanking and overscan intervals. A video signal
typically includes vertical display intervals, or fields, having a
plurality of horizontal line intervals, e.g. 262.5 lines per field in
10   NTSC video systems. The beginning of each vertical and horizontal
interval is identified by respective vertical and horizontal sync
pulses that are included in a composite video signal. A portion of
each vertical interval is a vertical blanking interval that is not
normally intended for display. In addition, several line intervals
15   adjacent to the vertical blanking period may be within an
overscan region of a video display and will not be visible.
          The lack of image information intended for display
during blanking and overscan intervals makes it possible to insert
an auxiliary information component, e.g. teletext or closed caption
20   (CC) data, into these intervals. Closed caption data represents
speech or other sounds in the audio portion of the video program.
The closed caption data is displayed in a portion of the video
display simultaneously with the corresponding video program
display to serve as an aid for hearing impaired viewers.
25   Standards such as Federal Communications Commissions (FCC)
Regulations define the format for each type of auxiliary
information including the location of the information within a
vertical interval. For example, the present closed captioning
standard (see e.g. 47 CFR §§ 15.119 and 73.682) specifies a closed
30   caption signal must occur during line 21 of field 1 in the format
shown in Figure 1.
          Referring to Figure 1, the closed caption signal includes
a run-in clock (RIC) signal that occurs during the first half of line
21. The RIC signal is used as described below to facilitate the
35   extraction of the closed caption data that occurs during a data
interval in the last half of line 21. A signal transition at the

beginning of a "start bit" interval shown in Figure 1 indicates the beginning of the data interval. The start bit interval is followed by a signal during the remainder of the data interval that represents 16 bits of binary information. Each of the start bit and binary bit intervals is approximately 2 µs in duration. The 16 binary bits represent two 8-bit character codes in the case of closed caption data. Each character code includes a 7-bit ASCII code and a parity bit.

The FCC standard further specifies that the closed caption signal may include two "channels" of closed caption data designated C1 and C2, and two "channels" of text data designated T1 and T2. Whether data in the closed caption signal is associated with C1, C2, T1, or T2 is determined by control codes that are included in the data. These control codes are listed at 47 CFR §15.119. Two channels of closed caption data make it possible to provide closed captioning in two languages. For example, captioning in English is on C1 and captioning in Spanish is on C2. Because speech is not continuous in a video program, the second language information can be inserted into the closed caption signal during intervals when speech is not occurring. The T1 and T2 text channels provide similar dual-language capability for the display of text that may be unrelated to the audio portion of the video program.

United States law requires that all television receivers 13 inches and larger in size that are sold in the U.S. after 1 July 1993 must be capable of decoding a closed caption signal (see 47 CFR §15.119). This requirement adds to the cost and complexity of most televisions. Many television users, particularly individuals who are not hearing impaired, may not wish to utilize the closed caption capability. Thus, television manufacturers must invest in the development of a feature that is of value to only a limited number of individuals who purchase televisions. In addition, many individuals will be compelled to pay for a feature that is of little or no value to them.

The embodiment of the present invention concerns a system for processing auxiliary video signals that provides for

- 3 -

decoding an extended data services (EDS) signal in line 21 of field
2. The EDS signal is transmitted in addition to closed caption
information. Extended data services provide a general purpose
video system information and control capability. Extended data
services information is arranged in packets of data. Each packet
provides information regarding current or future video programs,
the source of the video program, and miscellaneous information
such as time of day. The extended data services data may be
decoded to control the operation of a video system including a
videocassette recorder (VCR) and a television receiver.

The invention may be better understood by referring
to the drawing, in which:

Figure 1 shows an example of an auxiliary video data
signal such as a closed caption or extended data services signal;

Figure 2 shows, in block diagram form, a portion of a
video signal processing system incorporating a closed
caption/extended data services decoder constructed in accordance
with an aspect of the invention;

Figure 3 shows a flowchart illustrating the operation of
the system shown in Figure 2;

Figure 4 shows an example of the interleaving of
closed caption and extended data services data; and

Figure 5 shows, in block diagram form, a portion of a
video signal processing system for generating a video signal
including extended data services information.

An extended data services (EDS) signal exhibits the
same format as the closed caption (CC) signal format that is shown
in Figure 1 and described above. However, an EDS signal occurs
during line 21 of each field 2 interval. EDS data provides a
variety of information in addition to closed caption information.
For example, EDS data may identify a particular current or future
program and provide information such as the duration, title, and
content of the program. This information may be captured by the
video receiver and displayed in response to activation by a user.
As an example, a user selecting a program that is in progress may
identify the program by causing the title that is extracted from

-4-

EDS data to be displayed. Alternatively, the a video recorder can be programmed with EDS data to record a particular program.

A decoder shown in Figure 2 decodes CC and EDS data from a video signal. The decoder may be part of a video signal processing integrated circuit. In Figure 2, composite video signal VIDEO is input to data slicer 200. Data slicer 200 converts closed caption and extended data services information in analog signal VIDEO into serial digital data in signal SERDAT. Data slicer 200 may be implemented, for example, using a comparator that compares the level of signal VIDEO to a threshold level during the data interval in the last half of the line 21 interval (see Figure 1). The threshold level in data slicer 200 is referred to as the slicing level. Logic 0 and logic 1 levels in signal SERDAT represent levels of signal VIDEO that are less than and exceed, respectively, the slicing level.

The accuracy of data slicing is improved if the slicing level is approximately 50% of the amplitude of the data signal in the last half of the line 21 interval. The run-in clock (RIC) signal in the first half of the line 21 interval (see Figure 1) may be used to adapt the slicing level to the data signal amplitude. For example, setting the slicing level to the average of the RIC signal amplitude provides an appropriate slicing level because FCC requirements specify that the amplitude of the RIC signal is the same as the data signal amplitude.

The CC or EDS data in signal SERDAT is clocked serially into shift register 210 by a clock signal SERCLK. Signal SERCLK is generated by timing signal generator 220 during the data interval within line 21, i.e., the latter portion of line 21 in which the information representing the 16 data bits occurs (see Figure 1). Generator 220 determines when line 21 is present in signal VIDEO by counting horizontal lines in the video signal as indicated by horizontal sync pulses in signal VIDEO. The horizontal line count is initialized at the beginning of a video field as indicated by the vertical blanking intervals in signal VIDEO. A sync separator is included in generator 220 to produce a separated sync signal from composite video signal VIDEO that provides the required

horizontal and vertical synchronization information.
Alternatively, as shown in Figure 2, signals VERT and HOR from
deflection circuitry in a video system could be used for
synchronization.

5   The 16 bits of data in register 210 are designated bits 0 to
15 in Figure 2. Bits 7-0 represent the first CC or EDS character,
CHAR#1, and bits 15-8 represent the second character, CHAR#2.
Bits 15 and 7 are the parity bits of the respective characters. The
serial data in register 210 is converted to parallel data via 16
10   parallel outputs from register 210. The parallel data is output to
other units in the video system such as an on-screen-display
(OSD) processor (not shown in Figure 2) for generating signals to
display closed captioning data and certain types of EDS data (e.g.,
program title).   The parallel data in CHAR#1 and CHAR#2 is also
15   coupled to processing unit 230 for decoding of EDS information.

The format of EDS information is explained in detail
below. Briefly, EDS information is arranged in packets of
information. Each packet includes a plurality of 8-bit characters
from a plurality of occurrences of line 21 of field 2. Each packet
20   represents a complete piece of information that includes both
control and data characters.

The control characters identify a particular EDS control
function (e.g., start packet, continue packet, or end packet) in a
manner that distinguishes EDS information from closed caption
25   information. Because CC data is in line 21 of field 1 and EDS data
is in line 21 of field 2, it would appear that distinguishing field 1
from field 2 is sufficient to distinguish CC data from EDS data.
However, closed caption service may be improved in certain
instances by expanding closed caption data service to line 21 of
30   both fields 1 and 2. For example, the bandwidth of channels C1
and C2 in line 21 of field 1 may be insufficient to provide dual
language capability for very rapid speech.   Additional bandwidth
is provided by defining channels C3 and C4 of closed captioning in
line 21 of field 2. Similarly, additional text channels T3 and T4
35   may be defined in line 21 of field 2. If closed captioning can occur
in line 21 of field 2, the EDS data must be distinguishable from

- 6 -

closed caption information. This is accomplished as described below by the choice of EDS control characters.

EDS control characters also indicate the class and type of information included in a packet. Packet class designations indicate general classifications of the information included in a packet. For example, a packet class indicates whether the packet contains information pertaining to a future program, the current program, the source of a program (e.g., the broadcast network), or miscellaneous information (e.g., time of day). Each packet class encompasses a plurality of specific types of information. In addition to packet class, EDS control characters also identify the particular type of information in a packet. For example, a packet type of "program title" within the "current program" class indicates that the data characters in the packet represent the title of the current program.

EDS packets may be transmitted repeatedly by the video signal source by making use of all occurrences of line 21 in field 2 that are not being used for other purposes such as closed caption or text data. For example, the current program title might be retransmitted every 2 minutes to ensure that a user can access current program title information with relatively little delay. Other information such as future program data might be transmitted at less frequent intervals or when changes to the program schedule occur.

In Figure 2, processor 230 includes decoder 233 for detecting and decoding EDS information. The decoding process in decoder 230 is controlled by control unit 233. When line 21 ends as indicated by signal LINE21 from timing generator 230, new character data is present in register 210. If the current video field is field 2, as indicated by signal FIELD from timing generator 230 being at logic 1, the new character data in register 210 may be EDS data. Control unit 233 responds to signals FIELD and LINE21 by generating signal EDCTRL to initiate the decoding process in decoder 235.

Decoder 235 first tests the CHAR #1 code to determine if the character data is EDS data. If CHAR #1 is an EDS control

- 7 -

code, decoder 235 proceeds to decode the EDS control information. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included EDS data, the current CHAR #1 code is processed as EDS data. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included closed caption data, the current CHAR #1 code is processed as closed caption data.

If CHAR #1 is an EDS control code, CHAR #1 is decoded to establish the EDS packet function (i.e. start, continue, end) and packet class. As described below, if CHAR #1 indicates "packet start", the CHAR #2 code represents the packet type. The decoded function, class, and type information is communicated to control unit 233 from decoder 235 via signals PFUNC, PCLASS, and PTYPE, respectively. EDS data characters follow "start", "type", and "continue" control characters. Control unit 233 causes the decoded packet control information and data characters to be stored in memory 237 until a complete packet is received as indicated by the EDS control code for the "end packet" function.

The "end packet" control code in CHAR #1 is followed in CHAR #2 by a "checksum" value that is tested in decoder 235 to evaluate whether the data in the packet is error free. If the packet data is error free, subsequent decoding and storage of the packet data that is indicated by the packet class and type information is completed. If the checksum evaluation indicates that the packet data includes an error, the packet data is ignored and a subsequent retransmission of the packet will be captured to provide the correct data.

Decoder 235 generates system control signals SYSCTRL for controlling the aspects of the video system in response to the EDS information. For example, a video cassette recorder (VCR) may be activated to begin recording or set the correct time of day in response to control signal VCRCTRL from decoder 235. Similarly, a television may be controlled via signal TVCTRL to modify the on-screen display (OSD) processor operation to display closed captioning in response to EDS data indicating the presence

- 8 -

of closed caption services. Processor 230 in Figure 2 also includes capability for detecting and decoding closed caption data. Thus, control signals SYSCTRL also include closed caption control signals coupled to the OSD processor that control the closed caption
5   display.

Processor 230 in Figure 2 may be implemented using a microprocessor. For example, the sequence and control functions of unit 233 could be accomplished with a software control program. Data slicer 200, register 210, and timing signal
10 generator 220 may also be included with the microprocessor function in a single integrated circuit. The operation of an embodiment of the system in Figure 2 including a microprocessor may be better understood by referring to a flowchart shown in Figure 3.

15   In Figure 3, processing begins at step 300 in Figure 3 when closed caption or EDS processing is enabled by events such as the receiver being turned on or activation of EDS capability by a user (e.g., via a remote control button). Operation pauses at step 310 until a line 21 interval is detected. This indication may be
20 provided, for example, by signal LINE21 in Figure 2. At step 320 in Figure 3, serial data from line 21 is loaded into a data register (e.g., register 210 in Figure 2). Next, the current field is determined at step 325 by, e.g., testing signal FIELD in Figure 2. If the current field is field 1, the data in the data register cannot
25 represent EDS data, and operation continues at step 335 where the register data is processed as closed caption data.

At step 325, if the current field is field 2, operation continues at step 330 where CHAR #1 is evaluated to determine if CHAR #1 is closed caption data in field 2. If CHAR #1 is closed
30 caption data, step 335 is executed where the data is processed as closed caption data. For example, closed caption characters are transferred to an OSD processor for subsequent display. If CHAR #1 is not closed caption data at step 330, CHAR #1 is presumed to be EDS data and operation proceeds to step 340. At step 340,
35 CHAR #1 is tested to determine if CHAR #1 represents an EDS control code. If CHAR #1 is not an EDS control character at step

340, the character is EDS data that is stored in memory at step 345.

Detection of an EDS control code at step 340 is followed by decoding of CHAR #1 at step 350 to determine the EDS packet function and packet class. Signals PFUNC and PCLASS in Figure 2 are generated at step 350. The packet function is tested further at step 360 to determine whether the packet function indicates the end of the packet. If the function is not "end packet", CHAR #2 is decoded at step 365 to determine the packet type. Signal PTYPE in Figure 2 is generated at step 365. If the end of the packet is detected at step 360, the checksum in CHAR #2 is tested at step 370 to detect errors in the packet data. The packet data is processed further at step 375 if no errors are detected by, for example, decoding control information in the packet data to generate control signals for the system or storing the packet data for later use, such as in the case of program title information, activated by a user.

Following steps 310, 335, 345, 365, 370, and 375 in Figure 3, operation continues at step 380 where the system checks to determine if auxiliary video information (i.e. CC or EDS data) processing remains enabled. If enabled, operation continues by searching for the next occurrence of line 21 at step 310. If disabled, the procedure in Figure 3 is exited at step 390.

The described system processes auxiliary video information formatted in a predetermined manner to facilitate determining whether the information in line 21 is closed caption or EDS information. An exemplary EDS data formatting specification suitable for use with the embodiment depicted in Figure 2 is described below.

1. General EDS Data Format Information

The encoding of information for the extended data services (EDS) follows the same general format as for closed caption data encoding. This scheme consists of pairs of characters transmitted in the same field. The characters can be either a

-10-

control code pair or a data pair. The first byte of the pair determines whether the pair is a control pair or a data pair. If the first byte is in the range of 01h to 0Fh, the pair is a control pair. These values are not defined for captioning or text transmission. Upon receiving such a control code pair, the decoder would recognize subsequent data as EDS data. This is the same scheme that is used when decoding a closed caption signal to differentiate between caption and text mode, and between operating channel 1 and operating channel 2 (i.e. C1 and C2) of the caption signal. All characters are transmitted using odd parity. This is consistent with the closed caption conventions, and allows for simpler encoding/decoding hardware and software.

There are four varieties of EDS characters: Control, Type, Data, and Checksum. These characters may be transmitted in the combinations shown in Table 1.

Table 1

1ˢᵗ Byte	2ⁿᵈ Byte
Control	Type
Control	Data
Data	Data
Control	Checksum

As described above, the Control byte is in the range of 01h to 0Fh. The Type and Checksum bytes are in the range of 00h to 7Fh. The data byte is in the range of 10h to 7Fh for ASCII data, or in the range of 40h to 7Fh for Non-ASCII data. A Data byte of 00h is a null byte, and is always ignored.

A packet of EDS data is defined to be a collection of these pairs of bytes which conveys a complete piece of information. Each byte of EDS data is associated with data. A sub-packet is defined to be a control pair followed by some number, maybe zero, of data pairs. A data field is defined to be some number of bits within a Data byte. Each sub-packet may be transmitted independently and surrounded by other information. Note that a full packet could be transmitted using

only control pairs, or by also using data pairs for more throughput when possible.

There are three categories of Control bytes: Start, Continue, and End. The Start code indicates the beginning of a new packet. The Continue code indicates the following data is part of the packet which began with the last Start code. The End code indicates the packet is finished. The Type byte always follows the Start code to indicate the type of data contained in the new packet. The Checksum byte always follows the End code and is used for error detection.

Once a packet has been started, the data for the packet can be sent one byte at a time by using a Continue code with each byte to create a separate sub-packet for each byte. Each subpacket occurs during a single instance of line 21. For higher throughput, both bytes during a particular line 21 interval may contain data. In this case, a sub-packet includes data from a plurality of line 21 intervals. The data in a particular line 21 interval belongs to the sub-packet which began with the last Start or Continue code. The transmission of data pairs can not be interrupted by any other information. If it is necessary to interrupt the transmission of data pairs, the transmission of the packet is reestablished by sending a Continue control pair. The example shown in Table 2 illustrates the described process.

Table 2

1st Byte	2nd Byte
... other ...	... other ...
Start	Type
Data	Data
... other ...	... other ...
Continue	Data
Data	Data
Data	Data
... other ...	... other ...
Continue	Data
... other ...	... other ...
End	Checksum
... other ...	... other ...

-12-

The described approach will allow broadcasters the flexibility to simultaneously use any combination of captions or text using either C1 or C2, and EDS. It also permits the efficient transmission of EDS information if it is the only service offered on field two of the video signal.

There are four classes of packets currently defined: Current, Future, Network, and Miscellaneous. The Current packet contains information describing the program currently being transmitted. The Future packet contains information about an upcoming program to be transmitted. The Network packet contains information about the source of the video signal, e.g the broadcasting network. The Miscellaneous packet contains a variety of other useful information. Table 3 shows the assignment of these packet classes to their respective control codes.

Table 3

Control Code	Function	
01h	Current	Start
02h	Current	Continue
03h	Current	End
04h	Future	Start
05h	Future	Continue
06h	Future	End
07h	Network	Start
08h	Network	Continue
09h	Network	End
0Ah	Misc.	Start
0Bh	Misc.	Continue
0Ch	Misc.	End
0Dh	Reserved	
0Eh	Reserved	
0Fh	Reserved	

The transmission of one class of packet may be interrupted by another class of packet because each of the four packet classes has its own group of control codes. As a result, higher priority information can interrupt lower priority information. For example, information about the current program is probably more time critical than is information regarding a future program. A complete packet of "current" information might be sent in the middle of transmitting a packet of "future"

-13-

information. Thus, single fields of lower priority information can be inserted when unused line 21 intervals are available. However, a packet can only be interrupted by a packet of a different class. This ensures that packets can be "nested" without confusion regarding which packet data is to be associated with when a "continue" control code is issued.

Each packet conveys one piece of information. The first byte of the control code pair that begins a packet (i.e. "start" control code) determines the packet class as shown in Table 3. The type of information contained in the packet is determined by the Type code in byte two of the Start control code pair. The data bytes associated with a packet are held in temporary storage until the entire packet has been received and the checksum at the end of the packet has been validated. This prevents stored data from being corrupted, and also permits a packet to be aborted in the middle by starting a new packet of the same class.

The data types included in Current and Future packet classes are identical, i.e. the Type designations for both packets is the same. The difference between the Current and Future classes is the "object" of the data, i.e. "current" or "future" program. Any information regarding the current program which can be transmitted via EDS can also be sent in regard to a future program, and vice versa. The data contained in the Future packet always pertains to the "future" program that was most-recently specified in the EDS information. The future program is specified by sending a program identifier as the Type code in a Future packet. This Type code indicates which future program all transmitted information is to pertain to until another program identifier Type code is sent. Similarly, the information in the Current packet class always pertains to the program currently being transmitted. When a new program identifier is sent in a Current packet, the old program has finished and the newly specified program is beginning.

The data which constitutes the program identifier is simply the scheduled broadcast time, date, and receiver channel number. This has the advantage of being a compact, simple to

-14-

calculate, and unique identifier for each program broadcast on a
given channel per year. Even if the broadcast of a program is
delayed, it should still carry its originally scheduled time as its
program identifier data throughout its entire broadcast. This will
5   allow the recording of programs which are delayed or run longer
than expected. All time and date specifications, including current
time and date, are always given as Greenwich Mean Time (GMT).
Providing both the start time of a future program and the current
program identifier as GMT ensures that the identification of a
10   desired program will be independent of the viewer's time zone
and "daylight saving" time status. This permits correct recording,
e.g. in a video cassette recorder (VCR), even if the viewer does not
tell his VCR what time zone he is in. The only purpose for
specifying the viewer's time zone and daylight saving status is to
15   display the correct local time given the broadcast time as GMT.

    2.   Current and Future Packet Classes

            Table 4 shows the assignment of Type codes in the
20   Current and Future packet classes.

Table 4

Type Code	Function
00h	Unidentify Program
01h	Program Identifier
02h	Erase Program
03h	Stop Time
04h	Program Title
05h	Program Audience
06h	Program Type
07h	Audio Services
08h	Caption Services
09h	– undefined –
0Ah	– undefined –
.	.
78h	Description 8
.	.
7Fh	Description 1

2.1 "Unidentify Program" Packet Type

This packet contains zero bytes, but indicates the program is to be unidentified. It has the opposite effect of the program identifier packet. When received, all subsequent packets of this class will be ignored until another program identifier is received. This could be used as a signal that the specified program information has all been sent.

2.2 "Program Identifier" Packet Type

This packet contains either four or six bytes which define a program start time and date, relative to Greenwich Mean Time, and receiver channel number. The format of each byte is shown in Table 5. Note that bit #6 in each byte is always set to logic 1 because the information in each byte is not ASCII data. Also, note that the bit #7 (bit b7) is not shown in Table 5, or other tables below, because bit #7 of each byte is a parity bit.

Table 5

Data	b_6	b_5	b_4	b_3	b_2	b_1	b_0
minute	1	m_5	m_4	m_3	m_2	m_1	m_0
hour	1	T	h_4	h_3	h_2	h_1	h_0
day	1	D	d_4	d_3	d_2	d_1	d_0
month	1	Z	L	m_3	m_2	m_1	m_0
channel	1	c_5	c_4	c_3	c_2	c_1	c_0
channel	1	s_1	s_0	--	--	c_7	c_6

The minute data field has a valid range from 0 to 59, the hour field from 0 to 23, the day field from 1 to 31, and the month field from 1 to 12. The "D" bit determines if daylight saving time is currently being observed throughout the country. The "L" bit determines if the current year is a leap year. The "Z" bit determines if the current time in seconds should be reset to zero. The "D", "L", and "Z" bits are ignored by the decoder when processing this packet (see the description of the "time of day"

-16-

Type code assignment in the section below that pertains to the Miscellaneous packet class. The "T" bit is processed as part of the program identifier packet to determine if the program is subject to a local tape delay. Even if the broadcast of a program is delayed, it should still carry its originally scheduled time as its program identifier data throughout its entire broadcast.

The "channel" data field is an optional two-byte field having a valid range from 0 to 255. If the channel field is omitted, the receiver channel will default to the currently tuned channel. The channel field allows one channel to specify information for another channel. The channel data field contains a two bit subfield which specifies the source input. The source subfield has a valid range from 1 (S_1S_0 - 00) to 4 (S_1S_0 = 11) that can be used in a multi-wire cable system to specify the cable line.

2.3 "Erase Program" Packet Type

This packet contains zero bytes, but indicates the specified program data is to be completely deleted. This will be most useful for the Future packet class.

2.4 "Stop Time" Packet Type

This packet contains either zero or four bytes which define a program stop time and date relative to Greenwich Mean Time. If the packet contains zero bytes, the existing stop time will be erased. The format of the bytes is the same as for the "program identifier" packet described above in section 2.2 except that no channel data is needed. The "D", "L", and "Z" bits are also ignored by the decoder when processing this packet as described in section 2.2.

2.5 "Program Title" Packet Type

This packet contains a variable number, 0 to 32, of bytes which define a program title. If the packet contains zero

bytes, the existing program title will be erased. Each byte is an
ASCII character in the range of 20h to 7Fh. The variable size of
this packet allows for efficient transmission of titles of any length.
No "size" indicator byte is needed because the End control code
5 pair is used to terminate the packet.

2.6 "Program Audience" Packet Type

         This packet contains a variable number of bytes,
10 namely zero to three, which define the intended audience for the
program. If the packet contains zero bytes, the existing program
audience will be erased. For any data bytes in this packet, bit #6
is set to logic 1 because the data is not ASCII data. The format of
the data bytes is shown in Table 6.
15

Table 6

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	M	W	S	A	T	C
1	D	--	V	L	N	A
1	q_2	q_1	q_0	r_2	r_1	r_0

25   The data bytes in this packet must be sent in the order
shown in Table 6. Table 7 defines the function of the bits for
bytes one and two shown in Table 6.

Table 7

Byte One			Byte Two	
C	Children		A	Adult Situations
T	Teens		N	Nudity
A	Adults		L	Language
S	Seniors		V	Violence
W	Women		--	undefined
M	Men		D	Data Services

Bit definitions may be selected from the list in Table 7 in any combination that is needed to communicate the desired information. Byte one indicates the target audience. For example, to specify a program as suitable for the entire family, all bits in byte one would be set. Byte two indicates why the target audience may have been restricted from the entire family.

Byte three in Table 6 contains data fields representing program quality and rating information for movies. The format for byte three is shown in Table 8.

Table 8

q_2 q_1 q_0	Quality		r_2 r_1 r_0	Rating
0 0 0	Unknown		0 0 0	Unknown
0 0 1	*		0 0 1	G
0 1 0	*½		0 1 0	PG
0 1 1	* *		0 1 1	PG-13
1 0 0	* * ½		1 0 0	R
1 0 1	* * *		1 0 1	NC-17
1 1 0	* * * ½		1 1 0	X
1 1 1	* * * *		1 1 1	None

2.7 "Program Type" Packet Type

This packet contains a variable number, 0 to N, of bytes which specifies the type of information included in a particular program. The information in this packet could be used by a viewer to selectively look for certain types of programs. If the packet contains zero bytes, the existing program type will be erased. The first two bytes are not ASCII data and, therefore, bit #6 is set to logic 1 in the first two bytes. The third through Nth bytes are ASCII characters in the range of 20h to 7Fh.

The format of the first two bytes is shown in Table 9.

Table 9

b_6 b_5 b_4 b_3 b_2 b_1 b_0
1   N   S   E   E   L   C
1   f_1 f_0 t_1 t_0 s_1 s_0

-19-

The first two bytes must be sent in the order shown in Table 9.

The first byte defines the general category of the information in the program. The type of information indicated by the bits in the first byte is shown in Table 10.

Table 10

C	Classified
L	Life / Style
E	Education
E	Entertainment
S	Sports
N	News

A logic 1 in a bit position shown in Table 9 indicates that the program provides the corresponding type of information listed in Table 10. If necessary, multiple bits can be set to logic 1 to indicate that the program includes multiple categories of information. Byte two provides additional program information as shown in Table 11.

Table 11

f_1 f_0	Format		t_1 t_0	Time Slot		s_1 s_0	Status
0 0	Special		0 0	Once		0 0	Premiere
0 1	Series		0 1	Once Week		0 1	Live
1 0	Mini-Series		1 0	Weekdays		1 0	Tape Delay
1 1	Movie		1 1	Every Day		1 1	Re-Run

Bytes three to N provide additional information which can be used to further specify the type of programming. These bytes are sent as ASCII characters, but the character codes represent the words listed in Table 12.

Table 12

Code	Qualifier
20h	Unknown
21h	Action / Adventure
22h	Amatuer
23h	Animated
24h	Arts
25h	Auto
26h	Awards
27h	Baseball
28h	Basketball
29h	Bowling
2Ah	Boxing
2Bh	Business
2Ch	Cartoon
2Dh	Classical
2Eh	Comedy
2Fh	Commercial
30h	Computer
31h	Concert
32h	Contemporary
33h	Criminal
34h	Dancing
35h	Diving
36h	Documentary
37h	Drama
38h	Erotica
39h	Fantasy
3Ah	Fiction
3Bh	Financial
3Ch	Football
3Dh	Fund Raiser
3Eh	Game / Quiz
3Fh	Golf

Code	Qualifier
40h	Gymnastics
41h	Health
42h	Hobby
43h	Hockey
44h	Home
45h	Horror
46h	Hunting / Fishing
47h	Improvement
48h	Informational
49h	Instructional
4Ah	Investment
4Bh	Legal
4Ch	Local
4Dh	Medical
4Eh	Military
4Fh	Musical
50h	Mystery / Suspense
51h	National
52h	Nature
53h	Opinion
54h	Performing
55h	Personal
56h	Political
57h	Professional
58h	Public
59h	Racing
5Ah	Religious
5Bh	Romance
5Ch	Sales
5Dh	Science
5Eh	Service
5Fh	Shopping

Code	Qualifier
60h	Singing
61h	Skating
62h	Skiing
63h	Soap Opera
64h	Soccer
65h	Special
66h	Talk
67h	Tennis
68h	Text
69h	Track / Field
6Ah	Travel
6Bh	Variety
6Ch	Video
6Dh	Volleyball
6Eh	War
6Fh	Weather
70h	Western
71h	World
72h	Wrestling
73h	special 1
74h	special 2
75h	special 3
76h	special 4
77h	special 5
78h	special 6
79h	special 7
7Ah	special 8
7Bh	special 9
7Ch	special 10
7Dh	special 11
7Eh	special 12
7Fh	Other

The bytes listed in Table 12 may be used in whatever combination is necessary to specify the desired level of information regarding the type of programming. However, multiple bytes should be sent in proper grammatical order. In addition, it should be noted that receivers may impose limitations on the number of bytes that will be recognized.

The byte designated "Unknown" in Table 12 is the default value if no other bytes from Table 12 are included in the Program Type packet. The twelve "special" bytes listed in Table 12 may be defined by each network to best suit individual

programming needs (see the Type code assignments for "special qualifiers" in the section below that describes the Network packet class). The byte designated "Other" in Table 12 indicates that the type of programming is known and does not fit into any of the defined programming types. All twelve of the "special" bytes listed in Table 12 implicitly include the "Other" designation.

2.8 "Audio Services" Packet Type

This packet contains either zero or two bytes which define the contents of the main and second audio programs that are associated with the video signal. If the packet contains zero bytes, existing audio services information will be erased. Bit #6 is set to logic 1 in the data bytes in this packet because the data bytes are not ASCII data. The format of the bytes is shown in Table 13.

Table 13

Data	b_6	b_5	b_4	b_3	b_2	b_1	b_0
main	1	l_2	l_1	l_0	t_2	t_1	t_0
sap	1	l_2	l_1	l_0	t_2	t_1	t_0

Each of the two bytes listed in Table 13 contains two data fields: language and type. The language field of each byte represents the languages listed in Table 14.

Table 14

l_2	l_1	l_0	Language
0	0	0	Unknown
0	0	1	English
0	1	0	Spanish
0	1	1	French
1	0	0	German
1	0	1	Japanese
1	1	0	Other
1	1	1	None

-22-

The type field of each byte listed in Table 13 is encoded to represent the information shown in Table 15.

Table 15

Main Audio Program		
t_2 t_1 t_0	Type
0 0 0	Unknown
0 0 1	Mono
0 1 0	Simulated Stereo
0 1 1	True Stereo
1 0 0	Stereo Surround
1 0 1	Data Service
1 1 0	Other
1 1 1	None

Second Audio Program		
t_2 t_1 t_0	Type
0 0 0	Unknown
0 0 1	Mono
0 1 0	Descriptive Video Service
0 1 1	Non-program Audio
1 0 0	Special Effects
1 0 1	Data Service
1 1 0	Other
1 1 1	None

2.9 "Caption Services" Packet Type

This packet contains a variable number, 0 to 8, of bytes which define the available forms of caption encoded data. If the packet contains zero bytes, existing information regarding caption serves will be erased. One byte is included to specify each available service. Bit #6 is set to logic 1 in each byte because the data is not ASCII data. Each of the bytes is in the format shown in Table 16.

Table 16

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	l_2	l_1	l_0	F	C	T

The language data field (L_2-L_0 in Table 16) is encoded using the same format as for the audio services packet described in section 2.8 above. The "F" bit determines if the data is in TV field one ("F" = 0), or in field two ("F" = 1). The "C" bit determines if the data is in channel C1 ("C" = 0), or in channel C2 ("C" = 1). The "T" bit determines if the data is captioning ("T" = 0), or text

("T"=1). This information permits the broadcaster to completely specify the line 21 services that are available.

2.10.   "Undefined" Packet Types

Type Codes 09h and 0Ah in Table 4 are undefined. These type codes may be defined in the future to further expand EDS capability. For example, one of the undefined type codes might be allocated to provide information regarding video "scrambling". Various approaches are used for encoding, or scrambling, a video signal to prevent viewing by unauthorized users, e.g. "pay-per-view" programming. Information regarding the type of scrambling might be useful to permit authorized users to more effectively decode the scrambled signal.

Another possible use for the undefined codes is to provide information regarding the aspect ratio of the video image in a program. Aspect ratio information would permit the system to select only certain aspect ratio programs. Alternatively, the video receiver could use the aspect ratio information to adapt the signal to the particular display screen aspect ratio of the video receiver.

2.11.   "Description 'N'" Packet Type

These packets each contain a variable number, 0 to 32, of bytes which, when combined together, form a description of the program. If the packet contains zero bytes, the existing line of description information will be erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each packet of this type provides one line of a multiple line description of the program. The description can contain any information the service provider chooses including: episode title, date of release, cast of characters, brief story synopsis, etc. By varying the number of packets of Description "N" type, efficient transmission of program descriptions of any length is possible.

3.   Network Packet Class

              Table 17 lists the assignment of Type codes for the
      Network packet class.

<div align="center">Table 17</div>

Type Code	Function
00h	Unidentify Network
01h	Network Identifier
02h	Erase All Programs
03h	Network Name
04h	Call Letters
05h	Native Channel
06h	Tape Delay
07h	Special Qualifier 1
.	.
.	.
12h	Special Qualifier 12

3.1.   "Unidentify Network" Packet Type

              This packet contains zero bytes and indicates that the
      network is to be "unidentified". The effect is opposite to that of
      the "network identifier" packet (see section 3.2 below). After this
      packet is received, all subsequent packets of the Network class
      will be ignored until a network identifier packet is received. This
      packet type can be used as a signal that all network information
      has been sent.

3.2.   "Network Identifier" Packet Type

              This packet contains either zero or two bytes which
      define a receiver channel number for which network information
      is to be specified. The format of the bytes is the same as for the
      channel data field shown in Table 5 in section 2.2 above. The two
      byte channel field is optional. The receiver channel will default to
      the currently tuned channel if not specified. This field allows one
      channel to specify information for another channel.

3.3. "Erase All Programs" Packet Type

This packet contains zero bytes, but indicates all of the program information for the specified network is to be completely deleted.

3.4. "Network Name" Packet Type

This packet contains a variable number, 0 to 32, of bytes which define the name of the broadcasting network. If the packet contains zero bytes, the existing network name is erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each network should use a single unique name so that receivers can access information regarding the network that is stored internal to the receiver, e.g. a network logo that can be displayed when a network is selected.

3.5. "Call Letters" Packet Type

This packet contains a variable number, 0 to 32, of bytes which define the "call" letters of the local broadcasting station. If the packet contains zero bytes, the existing call letters are erased. Each byte is an ASCII character in the range of 20h to 7Fh.

3.6. "Native Channel" Packet Type

This packet contains either zero or two bytes which define the "native" channel number, i.e. local "over-the-air" broadcast channel number, that is assigned to a station. This information is useful if a cable channel number assigned to a station differs from the station's over-the-air broadcast channel number. If the packet contains zero bytes, the existing native channel number is erased. The format of the bytes is the same as for the channel field listed in Table 5 in section 2.2 above.

-26-

3.7.   "Tape Delay" Packet Type

5   This packet contains either zero or one byte which
defines the number of half hours the local station routinely tape
delays network programs. If the packet contains zero bytes, the
existing tape delay information is erased. The data is not ASCII
data so bit #6 is always set to logic 1. The format of the data byte
in this packet is shown in Table 18.

10

Table 18

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	S	d_4	d_3	d_2	d_1	d_0

15

            The delay field (d_4-d_0 in Table 18) has a valid range
from 0 to 31, which represents time values from 0 hours and 0
minutes to 15 hours and 30 minutes in 30 minute increments.
20   The "S" bit is a sign bit, and determines if the delay value is to be
added to the expected program start time ("S" = 0) or subtracted
from it ("S" = 1). This delay would apply to all programs on the
channel which have the "T" bit set in their program identifier
information (see Table 5 in section 2.2 above). The delay value
25   defaults to zero if not specified.

3.8.   "Special Qualifier 'N'" Packet Type

            These packets each contain a variable number, 0 to 32,
30   of bytes which define the text to be associated with the "special"
bytes listed in Table 12 that may be used for specifying program
information. If the packet contains zero bytes, the text associated
with a "special" byte is erased. Each byte in this packet type is an
ASCII character in the range of 20h to 7Fh. Each packet provides
35   text for one network specific "special" program information byte.
For example, a station which offers mostly sports may define its

-27-

first five "special" bytes to represent sports such as: Poker.
SCUBA, Hang Gliding, Americas Cup. and Olympics. However. a
station which offers mostly music may define its first five
"special" bytes to represent types of music such as: Heavy Metal.
Rap, Pop, Country, and Disco. The meaning of the "special" bytes
can be redefined by the network at any time. If no text is
received to define a "special" byte, the byte will default to a single
blank space.

4. Miscellaneous Packet Class

        Table 19 lists the assignment of Type codes for the
Miscellaneous packet class.

Table 19

Type Code	Function
01h	Time of Day
02h	Time Zone
03h	Line Number
04h	No EDS
05h	Single EDS
06h	Directory EDS
07h	Program Pause
08h	Program Resume
09h	Impulse Capture

4.1. "Time of Day" Packet Type

        This packet contains four data bytes which define the
current time of day and date relative to Greenwich Mean Time.
The format of the bytes is the same as that shown in Table 5 for
the "program identifier" packet (see section 2.2 above), except
that no channel data is needed. The "D" bit is used to determine if
daylight savings time is currently being observed throughout the
country. This information. along with the viewer's specified time
zone and whether daylight savings time is locally observed. is
used to determine the correct local time. Local time is only used

-28-

to display the local time for the viewer. All internal timers and
clocks should be kept in Greenwich Mean Time.

The "L" bit is used to determine if the current year is a
leap year. This is needed to determine if the local day is February
28th or 29th when it is March 1st Greenwich Mean Time. The "Z"
bit is used to determine if the current time in seconds should be
reset to zero. This allows the time of day to be correct without
transmitting the full six bits of data to specify the current number
of seconds. The "T" bit is used to determine if the program is
subject to a local tape delay. If this bit is set, the time of day
clock should not be updated.

4.2. "Time Zone" Packet Type

This packet contains one byte which defines the
viewer's time zone and daylight savings status. The data is not
ASCII data so bit #6 is always set. The format of the single data
byte is shown in Table 20.

Table 20

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	D	h_4	h_3	h_2	h_1	h_0

The hour data field (bits h_4-h_0 in Table 20) has a
valid range from 0 to 23 and represents the nominal delay in
hours relative to GMT. The "D" bit determines if daylight savings
time is to be observed. This packet should only be sent when all
possible viewers reside in the same time zone.

4.3. "Line Number" Packet Type

This packet contains one byte which defines the
current line number and field for the tuned channel. This data is

not ASCII data so bit #6 is always set. The format of the byte is
shown in Table 21.

5   Table 21

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	F	l_4	l_3	l_2	l_1	l_0

10
The "line" field (bits L_4-L_0 in Table 21) has a valid range from 7
to 31. The "F" bit determines if the data is in TV field one ("F" = 0)
or in field two ("F" = 1).

15   4.4. "No EDS" Packet Type

             This packet contains zero bytes and indicates that the
tuned channel has no extended data services information
available.

20
      4.5. "Single EDS" Packet Type

             This packet contains zero bytes and indicates that the
tuned channel has extended data services information available
25   for a single channel.

      4.6. "Directory EDS" Packet Type

             This packet contains zero bytes and indicates that the
30   tuned channel has extended data services information available
for multiple channels. This information would be used to identify
a station which provides a continuous directory of information
about other channels.

35

-30-

4.7. "Program Pause" Packet Type

This packet contains zero bytes and indicates that the current program on the tuned channel has been interrupted. It will need to be retransmitted at least once per minute to maintain a pause. This is because receivers will time-out after one minute even if no program resume packet is sent.

4.8. "Program Resume" Packet Type

This packet contains zero bytes and indicates that the current program on the tuned channel has resumed. It is used to immediately end a program pause. Receivers should perform an automatic program resume if one has not been received within the last minute following a program pause.

4.9. "Impulse Capture" Packet Type

This packet contains either zero, eight, or ten bytes which define a program stop time and date, and start time and date, all relative to Greenwich Mean Time, and receiver channel number. If the packet contains zero bytes, existing information regarding impulse capture is erased. The format of the bytes is the same as for the "stop time" (see section 2.4) followed by the "program identifier" (see section 2.2). This packet provides all the information needed to permit a program to be easily recorded. The program identifier bytes follow the stop time bytes because the program identifier contains a variable number of bytes. The "D", "L", and "Z" bits are ignored by the decoder when processing this packet. The receiver channel will default to the currently tuned channel if not specified.

The signal format described above may be better understood by referring to Figure 4 which shows an example of the interleaving of CC and EDS data, and the nesting of EDS packets. In Figure 4, the first and second occurrences of line 21 in

- 31 -

field 2 (lines labeled "1" and "2" on the left side of Figure 4)
include closed caption or text data. In the third occurrence of line
21 in field 2, packet "A" of EDS data begins with a control code
(CHAR #1) and a type code (CHAR #2). The fourth occurrence of
line 21 includes EDS data that is part of packet "A". The fifth,
sixth, and seventh occurrences of line 21 in field 2 are closed
caption data. Because the EDS data at the start of packet A acts as
a break in the CC data, the CC data at line 5 in Figure 4 begins with
a "resume closed caption" control code to distinguish the closed
caption data from the EDS data.

A second EDS packet, labeled packet "B" in Figure 4,
begins at the eighth occurrence of line 21 and ends at the tenth
occurrence of line 21. Packet "B" is nested within packet "A"
which continues at the eleventh occurrence of line 21 with a
"continue" control code. Packet "A" ends at the thirteenth
occurrence of line 21. The end of packet "A" could be followed by
another EDS packet, closed caption data, or "null" characters, i.e.,
no data.

A video signal including EDS information in the format
described above can be generated using the exemplary system
shown in Figure 5. Referring to Figure 5, video signal source 510
providing signal SOURCE may be a video tape recorder or video
camera. Signals LINE21 and FIELD from unit 510 correspond to
signals of the same name in Figure 2 and synchronize the
operation of the system in Figure 5 to signal VIDEO.
Microprocessor 520 receives EDS and CC input data identified as
EDS INPUT and CC INPUT, respectively, in Figure 5 and formats it
into serial data signal SERIAL DATA. The CC and EDS input data
may be generated, for example, by someone typing CC and/or EDS
information such as a program title at a keyboard.

MUX 530 selectively couples either signal SOURCE or
signal SERIAL DATA to transmitter 540 in response to signal
SELECT from microprocessor 520. Transmitter 540 transmits
signal VIDEO over cable or by broadcasting. Output signal VIDEO
in Figure 5 corresponds to signal VIDEO in Figure 2. CC and EDS
data is inserted into signal VIDEO in Figure 5 by the operation of

-32-

MUX 530. When CC or EDS data is to be inserted, microprocessor
520 detects an occurrence of line 21 in the appropriate field via
signals LINE21 and FIELD and generates signal SELECT to cause
MUX 530 to couple signal SERIAL DATA to transmitter 540.
5   Microprocessor 520 then outputs the CC or EDS data on signal
SERIAL DATA causing the CC or EDS data to be included in signal
VIDEO via transmitter 540.

        Microprocessor 540 controls the priority of insertion of
CC and EDS data. For example, CC data has higher priority than
10 EDS data because a closed caption display should be synchronized
with the actual speech in the video signal. The CC data must be
transmitted as required to maintain the desired synchronization.
EDS data, however, may be transmitted whenever line 21
intervals are not being used for CC data.

15   Various modifications of the features described above
are possible. For example, future modifications of FCC
requirements may permit EDS data to be included in video lines
other than line 21 of field 2. In addition, packet classes and types
in addition to those described above may be defined. For
20 example, the "reserved" control codes in Table 4 and the
"undefined" type codes may be defined in the future. These and
other modifications are intended to be within the scope of the
following claims.

-33-

Claims

1. A television system comprising:
means for receiving a television signal partitioned into line intervals which are organized in successive fields; said television signal including auxiliary information in the form of a predetermined number of data words occurring in at one line of at least some of said fields; at least some of said data words representing alphanumeric characters and at least some of said data words representing control information;
means for extracting said data from said television signal; and
means for examining said extracted data words to determine when one of said extracted data words represent a class of information as well as control information, thereafter when one of said extracted data words represents a subclass of information of said class of information, and thereafter decoding said data words to obtain said information pertaining to said subclass.

2. The television system defined in claim 1, wherein:
two data words occur in sequence in a predetermined one of said line intervals; and
said means for examining examines the first of said two data words which occur in said predetermined line to determine if it represents a class of information as well as control information, and examines the second of said two data words which occur in said predetermined line to determine if it represents a subclass of information.

3. The television system defined in claim 2, wherein:
said data words representing alphanumeric characters are encoded in ASCII format.

-34-

4.   In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus
5   comprising:

        means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal;

        means coupled to said extracting means for converting
10   said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data service information and being
15   organized by packets of binary data, a packet of binary data being associated with a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;

        means coupled to to said converting means for
20   decoding said binary data of said first field intervals to produce text display signals; and

        means coupled to said converting means for decoding said control code data of said second field interval to identify said particular class of auxiliary information.
25

        5.   The apparatus of claim 4 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:
30   a current program class including auxiliary information concerning a video program currently provided via one of said video channels; and

        a future program class including auxiliary information concerning a video program that will be provided via one of said
35   video channels at a future time.

6.   The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a source class including auxiliary information concerning the source of said video signal.

7.   The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a miscellaneous class including auxiliary information not included in said current program class and said future program class.

8.   The apparatus of claim 5 wherein
    said predetermined line interval within said second field intervals is a twenty-first line interval;
    said binary data comprise first and second binary bytes; and
    said decoding means decodes said first binary byte to identify said particular class of auxiliary information.

9.   The apparatus of claim 8 wherein said first and second bytes occur successively during said predetermined line interval.

-36-

      10.   In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus comprising:

      means for extracting an auxiliary information component occurring during a predetermined interval within said first and second field intervals from said video signal;

      means coupled to said extracting means for converting said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class, a plurality of type data identifying respective subclasses of said particular class, and information data corresponding to said subclasses;

      means coupled to said converting means for decoding said binary data of said first field intervals to produce text display signals; and

      means coupled to said converting means for decoding said control code data and said type data of said second field to decode said information data.

      11.   The apparatus of claim 10 wherein one of said plurality of type data corresponds to program identification information.

      12.   The apparatus of claim 11 wherein said program identification information comprises a time of day and a date at which said program will start.

-37-

13. The apparatus of claim 10 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:

a current program class including auxiliary information pertaining to a program currently provided via one of said video channels; and

a future program class including auxiliary information pertaining to a program that will be provided via one of said video channels at a future time.

14. The apparatus of claim 13 wherein the data packet corresponding to said current program class and said future program class each include respective program identification type data.

15. The apparatus of claim 10 wherein one of said plurality of type data corresponds to a program title.

16. The apparatus of claim 10 wherein one of said plurality of type data corresponds to caption service information.

17. The apparatus of claim 10 wherein one of said plurality of type data corresponds to program description information.

18. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network identification information.

19. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network name information.

-38-

20. The apparatus of claim 10 wherein said plurality of type data corresponds to line number information indicating which one of said plurality of horizontal line intervals in said first and second field intervals includes auxiliary information.

21. The apparatus of claim 10 wherein one of said plurality of type data corresponds to information indicating that extended data services information corresponding to other ones of said type data is not available in said video signal.

22. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to information indicating that said extended data services information concerns only one of said plurality of video channels.

23. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to information indicating that said extended data services information concerns at least one of said plurality of video channels.

24. The apparatus of claim 10 wherein
said predetermined line interval within said second field interval is a twenty-first line interval;
said binary data comprises first and second binary words; and
said decoding means decodes said second binary word to identify said particular type of auxiliary information.

25. The apparatus of claim 24 wherein said first and second bytes occur successively during said predetermined line interval.

-39-

26. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus comprising:

means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal; and

a microprocessor coupled to said extracting means for processing said extracted auxiliary information component in accordance with a sequence of instructions included in a control program; wherein

said control program includes a first portion causing said microprocessor to convert said extracted auxiliary information component from said predetermined line interval into binary data;

said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;

said control program including a second portion causing said microprocessor to decode said binary data of said first field intervals to produce text display signals; and

said control program including a third portion causing said microprocessor to decode said control code data to identify said particular class of auxiliary information.

-40-

27. The apparatus of claim 26 wherein
said predetermined line interval within said second
field interval is a twenty-first line interval;

said binary data comprise first and second binary
words; and

said microprocessor decodes said first binary word to
determine said particular class of auxiliary information and
decodes said second binary word to identify said particular type
of auxilliary information.

28. The apparatus of claim 27 wherein said first and
second bytes occur successively during said predetermined line
interval.

-41-

29.   In a system for processing a video signal
including first and a second field intervals within each of a
plurality of frame intervals and including a plurality of horizontal
line intervals within each of said field intervals, apparatus
5   comprising:

means for extracting an auxiliary information
component occurring during a predetermined line interval within
said first and second field intervals from said video signal; and
a microprocessor coupled to said extracting means for
10   processing said extracted auxiliary information component in
accordance with a sequence of instructions included in a control
program; wherein
said control program includes a first portion causing
said microprocessor to convert said extracted auxiliary
15   information component from said predetermined line interval into
binary data;
said binary data of said first field intervals being
associated with closed caption text information, said binary data
of said second field intervals being associated with extended data
20   services information and being organized by packets of binary
data, a packet of binary data representing auxiliary information
included in a particular one of a plurality of classes of auxiliary
information and including control code data identifying said
particular class, a plurality of type data identifying respective
25   subclasses of said particular class, and information data
corresponding to said subclasses;
said control program including a second portion
causing said microprocessor to decode said binary data of said
first field intervals to produce text display signals; and
30   said control program including a third portion causing
said microprocessor to decode said control code data and said type
data of said second field intervals to decode said information data.

35

-42-

30. The apparatus of claim 29 wherein
said binary data comprise first and second binary
words; and

said third portion of said control program causes said
microprocessor to 1) decode said first binary word to determine if
said binary codes represent said extended data services signal, 2)
further decode said first binary word of said binary codes
representing said extended data services signal to determine said
particular class of auxiliary information, and 3) decode said
second binary word to identify said particular type of auxilliary
information.

31. In a television system including means for
receiving television signals organized in successive field intervals,
each of said fields including a plurality of line intervals, auxiliary
data corresponding to closed caption information occurring in at
least one of said line intervals of at least some of said field
intervals, apparatus comprising:

means responsive to a selected one of said television
signals for extracting said data from said television signal; and

means responsive to said extracted data for
determining whether or not it corresponds to a control code
within a first control code range corresponding to closed caption
information or within a second code range corresponding to
extended data service information; said means being responsive to
said extracted data following the detection of a control code within
said first code range for processing said extracted data to produce
text representative display signals associated with a program
corresponding to a currently selected television signal; and said
means being responsive to said extracted data following the
detection of a control code within said second control code range
for determining the type of information represented by said
extracted data.

32. The apparatus recited in claim 31, wherein:

data corresponding to said closed caption information and data corresponding to said extended data service information comprises first and second bytes which occur successively during the same predetermined line interval of alternating first and second types of fields; and

said means responsive to said extracted data is responsive to first byte occurring during said predetermined line interval to determine if it represents a control code within said first control code range or a control code in said second control code range; said means being responsive to said second byte occurring during said predetermined line interval following a determination that said first byte represents a control code within said first control code range for processing said second byte to produce text representative display signals associated with a program corresponding to a currently selected television signal; said means being responsive to said second byte occurring during said predetermined line interval following a determination that said first byte represents a control code within said second control code range for determining the type of information represented by said second byte.

33. The apparatus recited in claim 31, wherein:

said television signals are organized in alternating first and second types of fields, data corresponding to said closed caption information occurring in said first type of fields and data corresponding to said extended data service information occurring in said second type of fields;

means responsive to said selected television signal for generating a field type indicating signal indicating the occurrence of said first and second types of fields is additionally provided; and

said means responsive to said extracted data is also responsive to said field type indicating signal for determining if acontrol code is within said first or second control code range.

-44-

34. The apparatus recited in claim 31, wherein:

said television signals are organized in alternating first and second types of fields, data corresponding to said closed caption information and data corresponding to said extended data service information occurring during the same predetermined line interval in said first and in said second type of fields;

means responsive to said selected television signal for generating a line indicating signal indicating the occurrence of said predetermined line during each of said first and second types of fields is additionally provided; and

said means for extracting said data is also responsive to said line indicating signal.

35. The apparatus recited in claim 34, wherein:

means responsive to said selected television signal for generating a field type indicating signal indicating the occurrence of said first and second types of fields is additionally provided; and

said means responsive to said extracted data is also responsive to said field type indicating signal.

36. The apparatus recited in claim 31, wherein:

at least some of said control codes within said second control code range identify respective classes of information and are included in respective packets of data, each packet also including a plurality of type codes identifying respective ones of a plurality of subclasses of information, said type codes being followed by respective data words representing information associated with respective subclasses.

37. The apparatus recited in claim 36, wherein:

said control codes within said second control code range also indicating whether a new packet has been started, a previously identified packet is continuing or a previously identified packet is terminating.
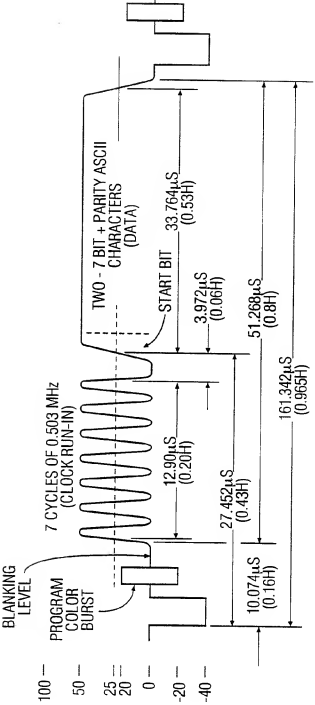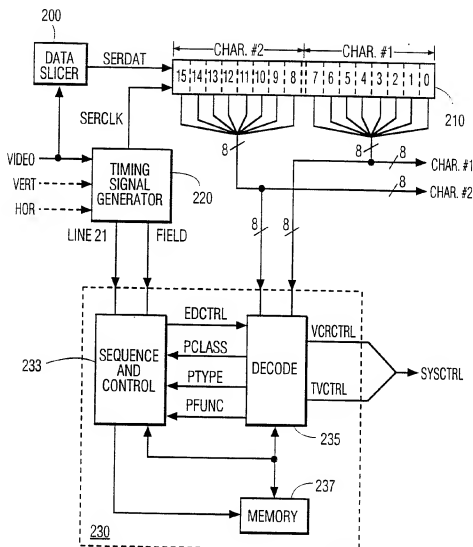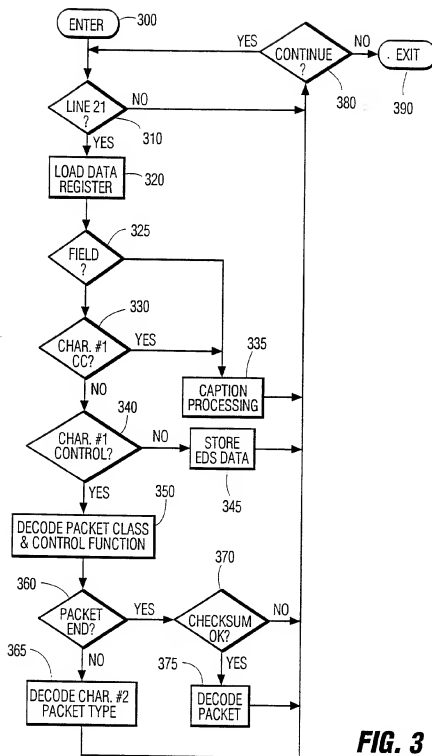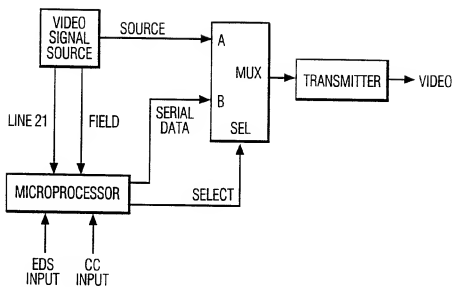
FIG. 1

FIG. 2

FIG. 3

OCCURRENCE OF LINE 21, FIELD 2	CHAR #1	CHAR #2	EDS PACKET
1	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
2	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
3	04h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: FUTURE PROGRAM	01h = EDS TYPE CODE TYPE: PROGRAM IDENTIFIER	START A
4	04h = EDS DATA: MINUTE = 0	48h = EDS DATA: HOUR = 8	A
5	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
6	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
7	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
8	01h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: CURRENT PROGRAM	08h = EDS TYPE CODE TYPE: CAPTION SERVICES	START B
9	4Ch = EDS DATA ENGLISH CAPTIONING AVAILABLE IN CHANNEL 1 OF FIELD 2	4Bh = EDS DATA ENGLISH TEXT AVAILABLE IN CHANNEL 2 OF FIELD 1	B
10	03h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: CURRENT PROGRAM	CHECKSUM	END B
11	05h = EDS CONTROL CODE FUNCTION: CONTINUE PACKET CLASS: FUTURE PROGRAM	42h = EDS DATA: DAY = 2 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	A
12	46h = EDS DATA: MONTH = 6 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	00h = NULL (NO DATA)	A
13	06h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: FUTURE PROGRAM	CHECKSUM	END A

FIG. 4

FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No **PCT/US 93/03988**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)[6]

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 H04N7/087

II. FIELDS SEARCHED

Minimum Documentation Searched[7]

Classification System	Classification Symbols
Int.Cl. 5	H04N

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched[8]

III. DOCUMENTS CONSIDERED TO BE RELEVANT[9]

Category[o]	Citation of Document,[11] with indication, where appropriate, of the relevant passages[12]	Relevant to Claim No.[13]
A	EP,A,0 447 968 (RCA LICENSING CORPORATION) 25 September 1991 see the whole document ---	1,3-6, 10-15, 18,19, 26,29, 30,31,36
A	EP,A,0 096 381 (INTERNATIONAL STANDARD ELECTRIC CORPORATION) 21 December 1983 see page 4, line 22 - page 5, line 16 see page 10, line 20 - line 28; figure 4 ---	1,4-6, 10,11, 13,14, 23,26, 29,36
		-/--

° Special categories of cited documents :[10]

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report
24 AUGUST 1993	0 2. 09. 93

International Searching Authority	Signature of Authorized Officer
EUROPEAN PATENT OFFICE	VERLEYE J.

Form PCT/ISA/210 (second sheet) (January 1985)

III. DOCUMENTS CONSIDERED TO BE RELEVANT   (CONTINUED FROM THE SECOND SHEET)

Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	FEDERAL COMMUNICATIONS COMMISSION (FCC) 47 CFR CH.I PAR. 73.682 10 January 1992, pages 192 - 198 'TV Transmission Standards.' cited in the application see page 194, column 2, line 35 - page 195, column 1, line 16	4,8,10, 24,26, 27,29, 31,33,34
A	EUROPEAN BROADCASTING UNION. TECH. 3262-E August 1990, GENEVA pages 1 - 44 'Specification of the Domestic Video Programme Delivery Control System (PDC).'	1
P,A	EP,A,0 503 070 (MATSUSHITA ELECTRIC INDUSTRIAL CO) 16 September 1992	1-6,8, 10-15, 17,24, 26,27, 29,31, 32,36,37
A	see column 2, line 4I - column 3, line 29; figures 4-7 & WO-A-9203018	
P,A	EP,A,0 488 379 (MATSUSHITA ELECTRIC INDUSTRIAL CO) 3 June 1992 see the whole document	1,4,5,7, 8,10-15, 17-19, 24,26, 27, 29-34,36

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.

US 9303988
SA   73829

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.   24/08/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0447968	25-09-91	None	
EP-A-0096381	21-12-83	DE-C- 3221768	29-12-83
		JP-B- 1031806	28-06-89
		JP-C- 1548250	09-03-90
		JP-A- 59057531	03-04-84
EP-A-0503070	16-09-92	JP-A- 4095480	27-03-92
		JP-A- 4213983	05-08-92
		JP-A- 4213984	05-08-92
		JP-A- 4213985	05-08-92
		WO-A- 9203018	20-02-92
EP-A-0488379	03-06-92	JP-A- 4200082	21-07-92